

Gravity Fed Eyewash (GFEW) Heater Retrofit Kit


Installation Instructions

1. Place GFEW tank on a stable working surface.
2. Insert heater into tank insuring that the 3/16 hole on the heater lid is facing the back of the tank. See photo 1.



3. Gently rotate the heater approximately 10° clockwise and counterclockwise and then back to the center, making sure the heater element does not touch the inside of the tank walls. Adjust rotation if needed to insure element is centered between tank walls.

- Using a 3/16 drill bit and the hole in the heater lid as a guide; drill a hole through the neck of the tank. Alternatively, you may use a marker to locate the hole to be drilled. See photo 2.

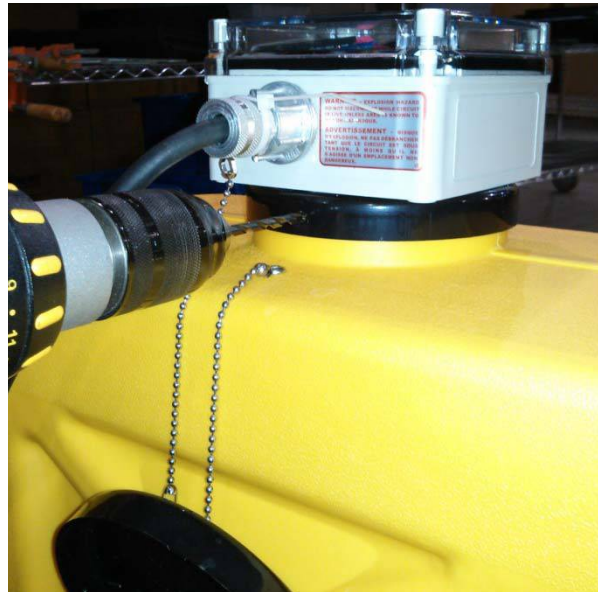

- Remove heater; clean out tank to remove any debris that may have entered.
- Install insulated jacket.
- Install heater; use included detent pin to secure heater lid to tank neck. See photo 3.

