



1-800-283-6266

Phone: (713) 466-1449 Fax: (713) 466-1703
E-Mail: customerservice@enconsafety.com

COMBINATION SHOWER/EYE/
FACEWASH WITH ABS BOWL
PART NUMBER: 01050274P20

SPECIFICATION:

Third party certified to ANSI Z358.1, the wheelchair accessible combination shower and eye/facewash shall deliver 20 gpm (75.7 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure from the shower head and 3.2 gpm (12.1 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure from the eye/facewash. Unit shall provide a non-injurious stream of water for 15 minutes or longer. Combination unit shall be supplied with chrome plated bronze stay open ball valves with and chrome plated ball and stainless steel stem. Valve sizes: shower 1", eye/facewash 1/2". Unit shall include SS actuator chain with actuation graphics, schedule 80 hot dipped galvanized steel piping and 1 1/4" supply/waste connection with a hot dipped galvanized steel flanged floor mounting plate for free-standing installation. Shower head shall be supplied with self-adjusting 20 gpm (75.7 lpm) regulator. Eye/Facewash to be supplied with self-adjusting 3.2 gpm (12.1 lpm) regulator to assure a constant and even dual stream flow pattern under 30/70 psi (206.8/482.6 kPa) hydraulic conditions. Shower head to be manufactured of high visibility yellow ABS. Shower head must deliver a minimum of 20" (50.8cm) diameter pattern to the target area 60" (152.4cm) above standing level. Eye/Facewash heads with float off covers to be manufactured of ABS mounted on an ABS wye in an ABS bowl. Combination units that provide improper flow pattern or contain deteriorating screens/filters are not acceptable. Combination unit shall be Encon Safety Products Model 01050274P20.

MATERIALS OF CONSTRUCTION

PIPING: Schedule 80 hot dipped galvanized piping.

VALVES: Chrome plated bronze stay open ball valves with chrome plated balls, stainless steel stem, stainless steel push plate with actuation graphic (eye/facewash) and stainless steel actuator with actuation graphic (shower). Valve sizes: shower 1", eye/facewash ½".

SHOWER HEAD: ABS.

EYE/FACEWASH HEAD: ABS dual stream heads with ABS plastic float off covers and ABS wye assembly.


BOWL: ABS.

REGULATOR: Self-adjusting 20 gpm (75.7 lpm) shower and 3.2 gpm (12.1 lpm) eye/facewash regulator.

SUPPLY: 1 1/4" NPT

WASTE: 1 1/4" NPT

WEIGHT: 60 lbs (27.22 kgs)

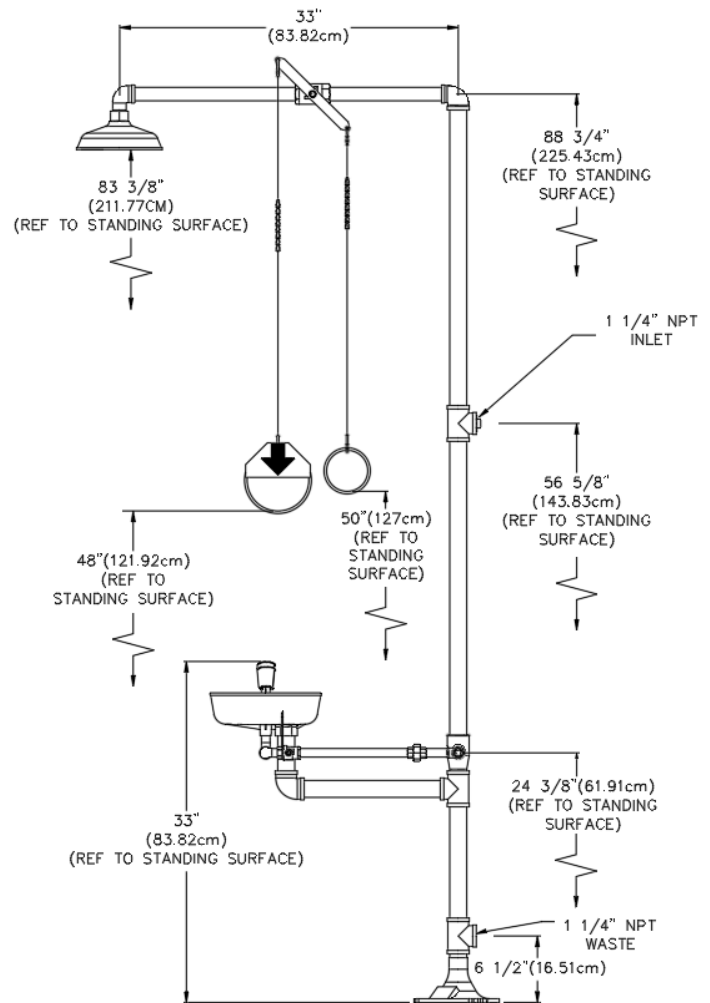

	MODEL #	DESCRIPTION
<input type="checkbox"/>	01050274P20	Unit as Specified