



# Self-Contained GRAVITY FED SHOWER & EYEWASH

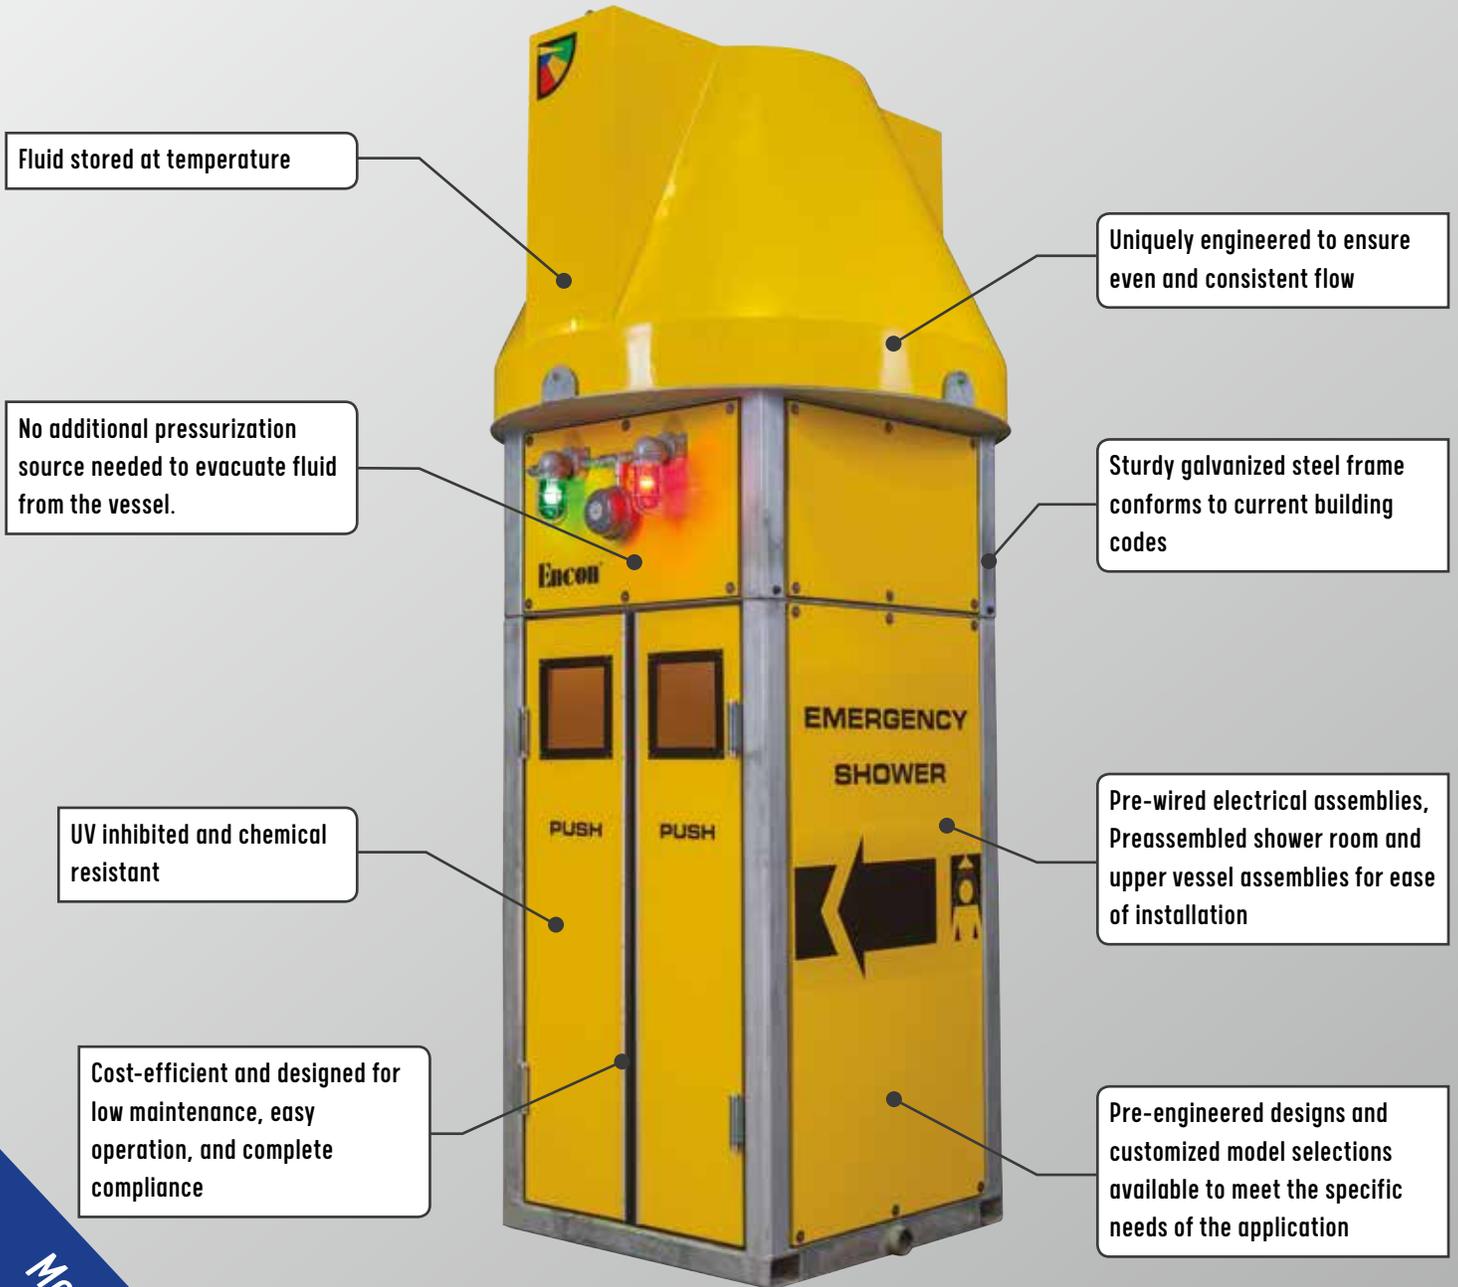

Meets the requirements of the ANSI/ISEA Z358.1 standard

# SPECIFICATION OPTIONS

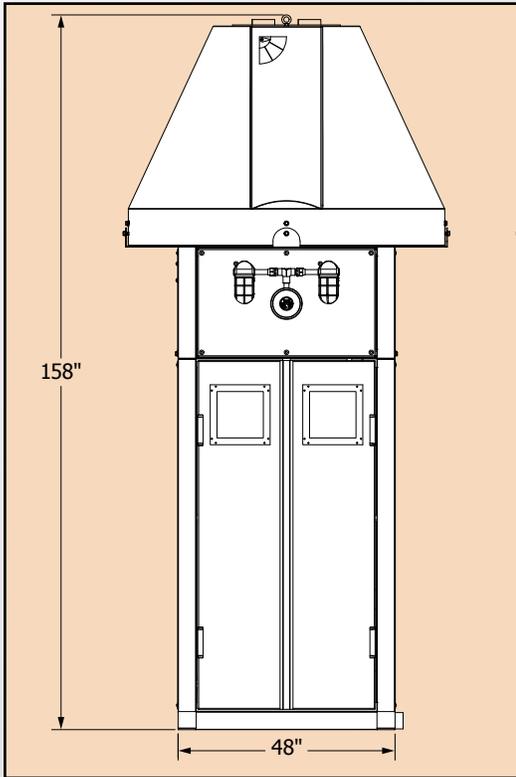

## Shower/Eyewash

- Plastic 20 GPM Shower, 0.4 GPM Eyewash
  - o Galvanized Piping, Brass Valves
  - o 304 Stainless Steel Piping & Valves

## Shower Alarm

- o MAP® Switch Activated Red Alarm Light & Bell
- o MAP® Switch Activated Red Alarm Light & Horn

## Secondary Remote Alarms

- o Over Temperature
- o MAP® Switch Door
- o Power Failure
- o Low Level
- o High/Low Tank Temperature
- o High/Low Tank Temp & Low Level
- o Low Room Temperature
- o Over Temperature, Low Level, & Power Failure

## Area Lighting

- o Clear
- o Green
- o Blue

## Power Options

### Voltage

- o 120 VAC, 1ph
- o 208 VAC, 3ph
- o 240 VAC, 3ph
- o 480 VAC, 3ph
- o 600 VAC, 3ph
- o Step-Down Transformer

## Freeze Protection

- o Radiant Heater (enclosed units only)



Quality parts, superior construction.

## Electrical Classification

- o NEMA-4
- o NEMA 4X
- o CL1 DIV 2, Grp. C & D
- o CL1 DIV 2, Grp. B, C, & D
- o CL1 DIV 1, Grp. C & D

## Structure

Steel frame available with or without base & side panels

### Privacy Panels / Enclosure

- o 3 plastic side panels
- o Enclosed with foam reinforced fiberglass panels and front double swinging doors

### Color

- o Yellow
- o Green

### Base and Drain

- o No Base
- o Base w/ Right Drain
- o Base w/ Left Drain
- o Base w/ Center Drain

## Graphics

- o English
- o Spanish & English
- o French & English

## STORED WATER

### HEATING TIMES

<i>Heater</i>	<i>Vessel Size</i>	<i>Time</i>
2 KW	425 Gallon	18 Hrs
6.3 KW	425 Gallon	6 Hrs
9 KW	425 Gallon	5 Hrs